

C-BIOMETRIC

Product code

0030




C-BIOMETRIC is a controller for the limitation of the use for elevator facility with an integrated reader for fingerprint and for 125 KHz EM Rfid keys.



Placing it in an elevator cabin or at the floors, offers the maximum versatility of the elevator's use and guarantees a high level of security.


C-BIOMETRIC supports up to 1.000 users with fingerprints, operating as a controller, or as a slave reader with the Wiegand 26 bit output for external controllers.

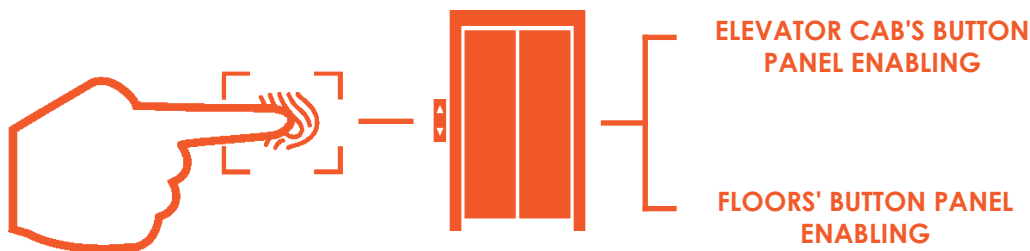

Fingerprints are memorized in the integrated memory with 450 DPI resolution. C-BIOMETRIC converts all the fingerprints into digital numeral code, usable in all software for the control and monitoring of the users, as same as the electronic keys.



CONTROL
SOFTWARE

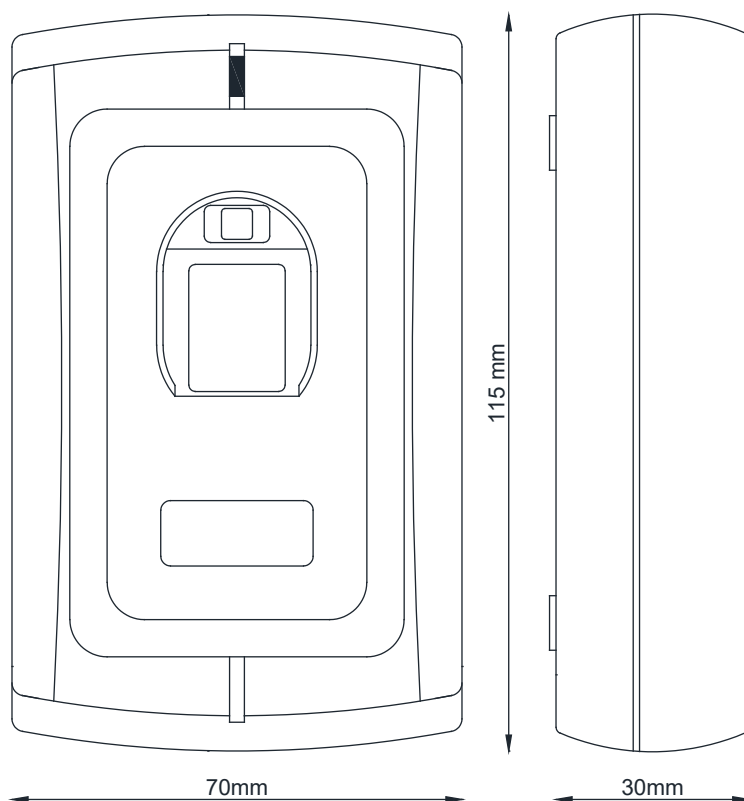

Material:	metal
Input:	12 V DC
Consumption:	80 mA
Output:	12 V DC
Output data:	Wiegand 26 bit
Maximum number of users:	fingerprints: 1.000
	electronic keys : 2.000
Rfid types:	125 KHz EM Marine
Fingerprint resolution:	450 DPI
Reading distance:	3 - 6 cm
Distance from controller (slave reader):	max 100 m
Operating temperature:	-10° to +50° C
Humidity:	90 % without water
Dimensions:	115 x 70 x 30 mm